270° LED CURVE TUBE HORIZONTAL BEND 15.5 x 27mm



A flexible, simple LED linear lighting system made from durable PVC. It has multiple applications including architectural interiors and exteriors, commercial applications, from joinery to neon signage and decorative sculptural elements.

TECHNICAL DATA

Input Power 24V DC CRI > 90

IP67 (Screwed End Connectors) **IP Rating**

IP68 (Moulded Cable End)

Bend Radius Horizontal - 80mm Min. Radius

Max. Length 5m (single input power)

10m (double input power)

15.5 x 27mm Dimensions

Dimming Type Triac Dali

Bluetooth

Watts per meter 12W

CCT & Lumens

3000K 785lm per meter

Mounting Mounting Clip

Aluminium Mounting Channel

Integral End Cap (Front / Side / Bottom) Connectors

Silicone End Cap (Front / Side / Bottom)

Product Code DL-CTHP-1527-270



Indoor/Outdoor | Recessed | Architectural Details

DL-CTHP-1527-270 PRODUCT CODE























CONNECTION & MOUNTING



END CABLE (EC)

SILICONE END CAP (SC)





SIDE CABLE (SC)



BOTTOM CABLE (BC)







ALUMINIUM MOUNTING CLIP




Aluminium Mounting Clip 14.3mm (W) x 17.6mm (H)






Aluminum Channel 14.3mm (W) x 17.6mm (H) *available in 1m lengths

TECHNICAL DRAWINGS

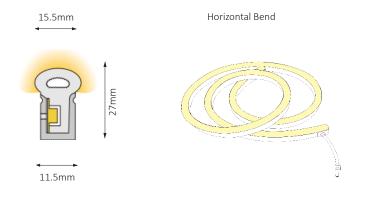









ORDERING GUIDE

Mode	IP	Curve Tube Length	Dimming	Colour (CCT)	Mounting	Connector
DL-CTHP-1527-270	IP67 IP67 IP68 IP68	5m 5m 10m 10m Custom C	Dali DD Bluetooth BB Triac TR	3000K 3K	Aluminium Clip Aluminium Channel	Integral Cap- End Cable ICEC Integral Cap- Side Cable ICSC Integral Cap- Bottom Cable ICBC Silicone Cap- End Cable SCEC Silicone Cap- Side Cable SCSC Silicone Cap- Bottom Cable SCBC

Code Example: DL- CTHP- 1527- 270 - IP67- 5M - DD - 3K

ALUMINIUM CLIP: DL-CTHS-MC-ALU-1527
ALUMINIUM CHANNEL: DL-CTHS-CH-1527

DUX LIGHTING

4 Villiers Drive, Currumbin Queensland 4223

Phone: +61 7 5598 1216

Email: info@duxlighting.com.au Web: www.duxlighting.com.au



Please visit our website for a comprehensive selection of our Curve Tube Range. For all order inquiries, please don't hesitate to reach out to the address provided below.

^{*} Mounting Options are purchased separately as per codes below: