


CURVE TUBE HORIZONTAL BEND 4 x 8mm



Linear Flexible Light Source. Compact size, IP67 and resistant to solvent & saltwater. Suitable for internal & external applications.

TECHNICAL DATA


Input Power	24V DC	
CRI	> 90	
IP Rating	IP67	
Bend Radius	Horizontal - 30mm Min. Radius	
Max. Length	5m (single input power)	
	10m (double input power)	
Dimensions	4 x 8mm	
Dimming Type	Triac	
	Dali	
	Bluetooth	
Watts per meter	6W	
CCT & Lumens per meter	2700K	220lm
	3000K	255lm
	4000K	215lm
	5000K	220lm
Mounting	Mounting Clip	
	Aluminium Mounting Channel	
Connectors	Integral End Cap (Front / Side / Bottom)	
	Silicone End Cap (Front / Side / Bottom)	
Product Code	DL-CTHS-0408	

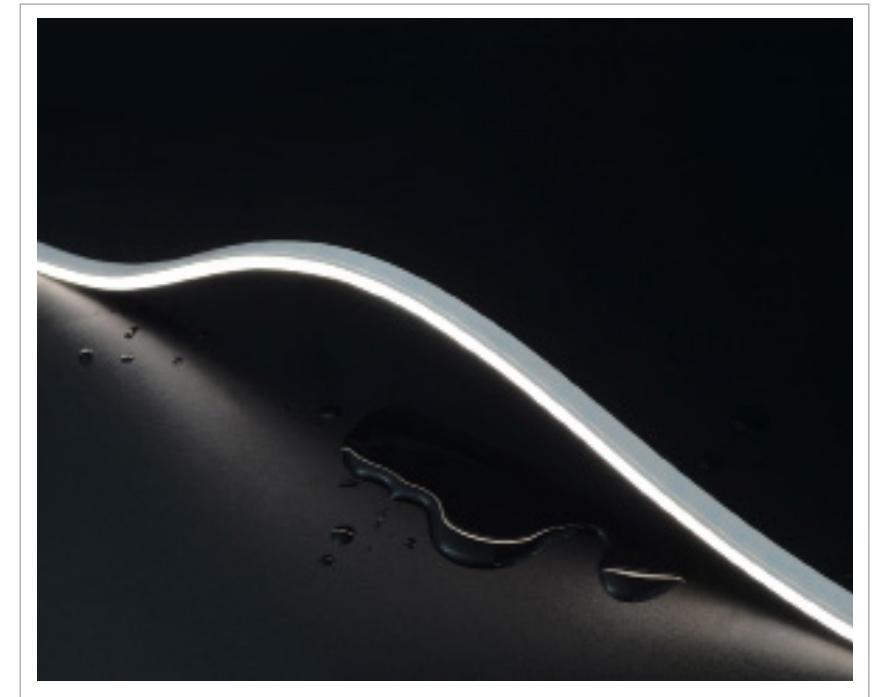


Indoor/Outdoor | Recessed | Architectural Details

DL-CTHS-0408

PRODUCT CODE



CONNECTION & MOUNTING

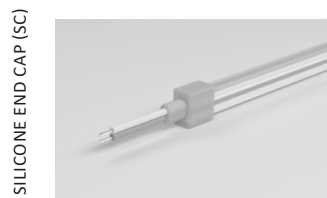


Aluminium Mounting Clip
6.5mm (W) x 7.2mm (H)




Aluminum Channel
6.5mm (W) x 7.2mm (H) x 1000mm (L)
**available in 1m lengths*


TECHNICAL DRAWINGS

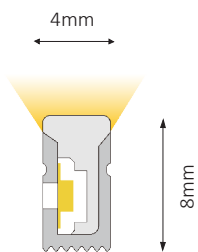

Horizontal Bend

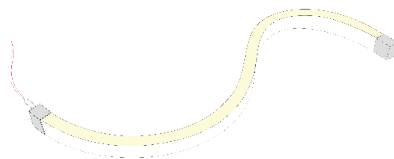

Minimum Bending Radius 80mm

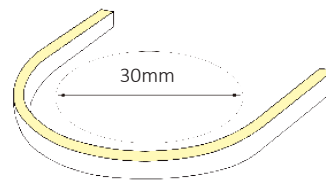

ORDERING GUIDE

Mode	IP	Curve Tube Length	Dimming	Colour (CCT)	Mounting	Connector
DL-CTHS-0408	IP67 IP67	5m 5m 10m 10m Custom C	Dali DD Bluetooth BB Triac TR	2700K 27K 3000K 3K 4000K 4K 5000K 5K 6000k 6K Red R Green G Blue B Yellow Y Pink P	Mounting Clip Aluminium Channel	Integral Cap IC Silicone Cap SC

Code Example: DL-CTHS-0408 - IP67 - 5M - DD - 27K

* Mounting Options are purchased separately as per codes below:

ALUMINIUM CLIP: DL-CTHS-MC-ALU-0408

ALUMINIUM CHANNEL: DL-CTHS-CH-0408

DUX LIGHTING

4 Villiers Drive, Currumbin
Queensland 4223
Phone: +61 7 5598 1216

Email: info@duxlighting.com.au

Web: www.duxlighting.com.au



CURVE TUBE RANGE

Please visit our website for a comprehensive selection of our Curve Tube Range.
For all order inquiries, please don't hesitate to reach out to the address provided below.