

360° CURVE TUBE 25MM Ø



Unique Flexible Light Source with a 360° uniform lighting emission. Compact size, IP65 and resistant to solvent & saltwater.

TECHNICAL DATA

Input Power	24V DC
CRI	> 90
IP Rating	IP65
Bend Radius	200mm Min. Radius
Max. Length	5m (single input power) 10m (double input power)
Dimensions	25mm diameter
Dimming Type	Triac Dali Bluetooth
Watts per meter	10W

CCT & Lumens per meter	2700K	517lm
	3000K	529lm
	4000K	556lm
	5000K	604lm
	6000K	586lm
	Red	246lm
	Green	502lm
	Blue	114lm
	Yellow	209lm
	Pink	409lm
	RGB	308lm
CCT 27K-6K	517lm	


Mounting	Transparent Clip Transparent Mounting Channel
Connectors	Integral Front Cable Entry Integral Side Cable Entry

Product Code DL-CTS-360




Indoor/Outdoor | Recessed | Architectural Details

DL-CTS-360
PRODUCT CODE




CONNECTION & MOUNTING

INTEGRAL END CAP

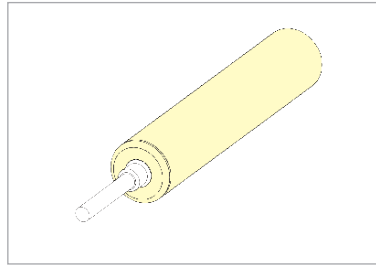

FRONT CABLE ENTRY (ICFE)

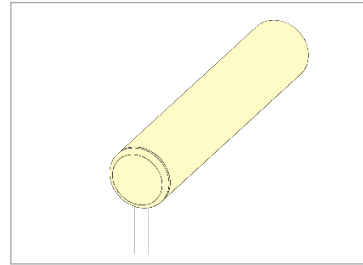

SIDE CABLE ENTRY (ICSE)

TRANSPARENT MOUNTING CLIP





Transparent Mounting Clip (MC)
25mm (W) x 30mm (H)

TRANSPARENT CHANNEL



Transparent Channel (CH)
25mm (W) x 30mm (H)
**available in 1m lengths*

TECHNICAL DRAWINGS

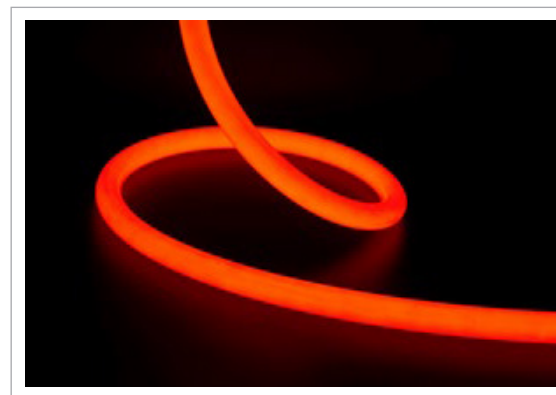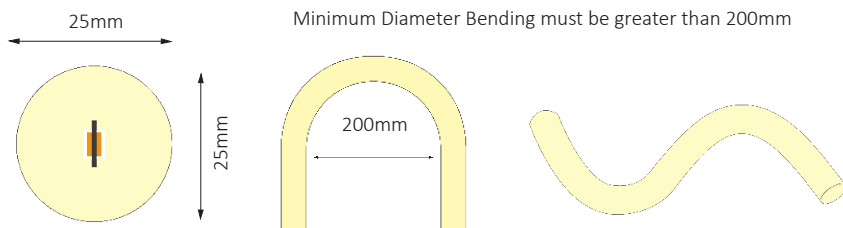

ORDERING GUIDE

Mode	IP	Curve Tube Length	Dimming	Colour (CCT)	Mounting	Connector
DL-CTS-360	IP65 IP65	5m 5m 10m 10m Custom C	Dali DD Bluetooth BB Triac TR	2700K 27K 3000K 3K 4000K 4K 5000K 5K 6000k 6K Red R Green G Blue B Yellow Y Pink P	Transparent Clip Transparent Channel	Integral Cap- Front Entry ICFE Integral Cap- Side Entry ICSE

Code Example: DL-CTS-360 - IP65 - 5M - DD - 27K

* Mounting Options are purchased separately as per codes below:

TRANSPARENT CLIP: DL-CTHS-MC-360

TRANSPARENT CHANNEL: DL-CTHS-CH-360

DUX LIGHTING

4 Villiers Drive, Currumbin
Queensland 4223
Phone: +61 7 5598 1216

Email: info@duxlighting.com.au

Web: www.duxlighting.com.au



CURVE TUBE RANGE

Please visit our website for a comprehensive selection of our Curve Tube Range.
For all order inquiries, please don't hesitate to reach out to the address provided below.