
LED CURVE STRIP



SMD 3528 / 2835 LED as lighting source. Supplied in 5m or 10m rolls cut to length. 3M adhesive tape on the backside. Clear mounting clips available. Viewing angle 120 degrees.

Application | Decorative lighting for festivals, events shows and exhibitions. Architectural Lighting, Landscaping and Water features. Path or contour marking. Residential Lighting

TECHNICAL DATA		CODES
Watts per meter	5W	(5W)
	10W	(10W)
	14W	(14W)
	19W	(19W)
Power Input	12V DC	(12V)
	24V DC	(24V)
LED Colours	2700K	(27K)
	3000K	(3K)
	4000K	(4K)
	5000K	(5K)
	Blue	(BL)
	RGB	(RGB)
	RGBW	(RGBW)
IP Rating	IP20	(IP20)
	IP54	(IP54)
	IP67	(IP67)
	IP68	(IP68)
Warranty	3 years	
Product Code	DL-C	
Code Example:	DL-C-5W-12V-27K-IP20	

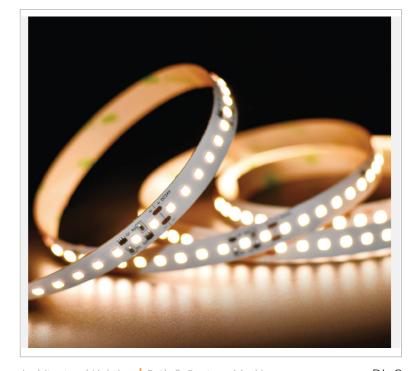

Architectural Lighting | Path & Contour Marking

DL-C PRODUCT CODE