

# SANTORINI

Energy efficient surface mounted brick light. Eliminates need for recessing and it totally non-corrosive. Suitable for any residential applications both interior and exterior, task lighting, landscape & caravans.

## TECHNICAL DATA

## CODES

Input Power	12V DC	(12V)
	24V DC	(24V)
	240V AC	(240V)
IP Rating	IP65	
Lamp Options	6W LED Boards	(6W)
LED Colours & Lumens	3000K   329 lm	(3K)
	4000K	(4K)
	5000K	(5K)
Dimming Type	Triac	(TR)
Mounting Colour	White	(W)
	Black	(B)
	Silver	(S)

Dimensions 250mm (w) x 130 (h) x 56 (d)

Materials  
 Base- Talc filled polypropylene UV stabilised  
 Lens- Opal Acrylic  
 Body- Luran  
 Brass Screws


Product Code **SAN-L6**

Ordering Example **SAN-L6-12V-6W-3K-TR-W**  
 (Santorini - L6- 12 Volts- 6 Watts- 3000K- Triac-White)



Microwave Sensor | Minimal Heat

**SAN-L6**  
PRODUCT CODE

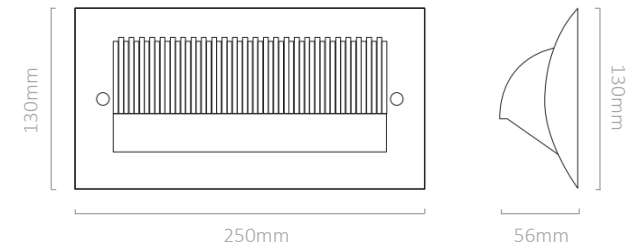

### MICROWAVE SENSOR

This sensor is a motion switch, which turns on the light on detection of movement, and turns off after a pre-selected hold time . A daylight sensor is also built-in to prevent the light switching on when there is sufficient natural light.

